

(12) NACH DEM VERTRAG ÜBER DIE INTERNATIONALE ZUSAMMENARBEIT AUF DEM GEBIET DES  
PATENTWESENS (PCT) VERÖFFENTLICHTE INTERNATIONALE ANMELDUNG

(19) Weltorganisation für geistiges Eigentum  
Internationales Büro



(43) Internationales Veröffentlichungsdatum  
11. Dezember 2003 (11.12.2003)

PCT


(10) Internationale Veröffentlichungsnummer  
WO 03/101843 A1

- (51) Internationale Patentklassifikation: **B65D 5/74** (72) Erfinder; und  
(75) Erfinder/Anmelder (nur für US): WEIST, Mario  
(21) Internationales Aktenzeichen: PCT/CH03/00328 [DE/DE]; Ohere Sommerhalde 18, 79780 Stühlingen (DE).  
(22) Internationales Anmeldedatum: 22. Mai 2003 (22.05.2003) (74) Anwalt: FELBER & PARTNER AG; Dufourstrasse 116, CH-8034 Zürich (CH).  
(25) Einreichungssprache: Deutsch (81) Bestimmungsstaaten (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.  
(26) Veröffentlichungssprache: Deutsch  
(30) Angaben zur Priorität: 917/02 31. Mai 2002 (31.05.2002) CH  
(71) Anmelder (für alle Bestimmungsstaaten mit Ausnahme von US): SIG TECHNOLOGY LTD. [CH/CH]; Laufengasse 18, CH-8212 Neuhausen am Rheinfall (CH). (84) Bestimmungsstaaten (regional): ARIPO-Patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),

[Fortsetzung auf der nächsten Seite]

(54) Title: SELF-OPENING CLOSURE FOR COMPOSITE PACKAGINGS OR FOR CONTAINER CONNECTION PIECES CLOSED BY A FILM MATERIAL.

(54) Bezeichnung: SELBSTÖFFNER-VERSCHLUSS FÜR VERBUNDPACKUNGEN ODER FÜR MIT POLIENMATERIAL VERSCHLOSSENE BEHÄLTERSTÜTZEN

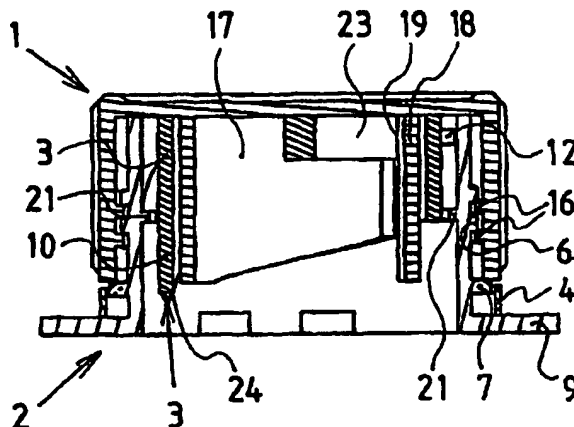

(57) Abstract: The invention relates to a self-opening closure consisting of a connection piece (2) having a projecting lower edge (9) which is to be welded or glued onto a composite packaging, an associated rotating cap (1), and a self-opening sleeve (3) which is arranged inside the connection piece (2) and can be rotated by the rotating cap (1). The inner side of the connection piece (2) is provided with four guiding sections which are arranged in a distributed manner on the inner circumference thereof and have a changing incline. Said sections co-operate with specially formed guiding ribs on the outer wall of the self-opening sleeve (3), causing said self-opening sleeve (3) to carry out a discontinuous downwards movement while continuously rotating inside the connection piece (2), guided along said guiding sections, the downwards movement overriding the rotational movement. In this way, the self-opening sleeve (3) pierces the paper or cardboard laminate with the tip (24) of its piercing pin, first in a steep helical downward movement, and then carries out a horizontal rotational movement about 340°, during which it cuts a round disk out of the laminate with its sharp cutting edge of the piercing pin, said round disk then pivoting downwards and stopping in this position.

[Fortsetzung auf der nächsten Seite]

WO 03/101843 A1



eurasisches Patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), europäisches Patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI-Patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, MI, MR, NE, SN, TD, TG).

*Zur Erklärung der Zweibuchstaben-Codes und der anderen Abkürzungen wird auf die Erklärungen ("Guidance Notes on Codes and Abbreviations") am Anfang jeder regulären Ausgabe der PCT-Gazette verwiesen.*

**Veröffentlicht:**

— mit internationalem Recherchenbericht

**(57) Zusammenfassung:** Der Selbstöffner-Verschluss besteht aus einem Stutzen (2) mit auskragendem unteren Rand (9), welcher auf eine Verbundpackung aufzuschweissen oder aufzuleimen bestimmt ist, einer zugehörigen Drehkappe (1) sowie einer innerhalb des Stutzens (2) angeordneten Selbstöffner-Hülse (3). Diese ist von der Drehkappe (1) in Drehung versetzbar. Die Innenseite des Stutzens (2) ist mit vier seinen Innenumfang verteilt angeordneten Führungstegen mit ändernder Steigung ausgerüstet. Diese wirken zusammen mit speziell geformten Führungsrippen an der Aussenwand der Selbstöffner-Hülse (3), was bewirkt, dass die Selbstöffner-Hülse (3) beim stetigen Drehen im Innern des Stutzens (2) durch Führung an diesen Führungsstegen eine unstetige Abwärtsbewegung ausführt, welche ihrer Drehbewegung überlagert ist. Dadurch sticht die Selbstöffner-Hülse (3) mit der Spitze (24) ihres Stechdoms zunächst in einer steilen schraubenlinienförmigen Abwärtsbewegung das Papier- oder Kartonlaminat an, und hernach vollführt sie eine horizontale Drehbewegung um 340°, während der sie mit ihrer scharfen Schneidkante am Stechdom eine runde Scheibe aus dem Laminat ausschneidet und diese hernach nach unten schwenkt und in dieser Lage festhält.

7/ARTS

10/516444

DT09 Rec'd PCT/PTO 30 NOV 2004

**LITERAL ENGLISH TRANSLATION OF P.C.T. APPLICATION NO.**

**PCT/CH03/00328, FILED MAY 22, 2003**

**A self-opener closure for composite packagings or for container**  
**spouts to be closed with film material**

5

[0001] The present invention relates to a self-opener closure for composite packagings as well as to container spouts or bottle spouts of all types to be closed with film material. At the same time one specifically envisages liquid packagings in the form of such composite packagings of film-coated paper in which, for example, milk, fruit juices, all types of non-alcoholic beverages or generally liquids also in the non-food range are packaged. The closure may however also be applied to composite packagings in which goods capable of being poured such as sugar, semolina or all types of chemicals and likewise are kept or packaged. With this film-coated paper it is the case of a laminate material such as a paper or cardboard web coated with plastic such as, for example, polyethylene and/or aluminium. Usually the volumes of such packagings range from 20 cl up to 2 litres and more. Alternatively the self-opener closure may also be assembled on containers which are closed by film material, such as on all types of bottles made of glass or plastic or on similar containers. Such closures of plastic are known in various embodiments. If they are envisaged for a composite packaging, they essentially form a pour-out or discharge spout having a rim which radially projects from its lower edge and which forms a closing flange at this discharge spout. The spout is equipped with an outer thread onto which a rotary cap may be screwed as a closure. Such a self-opener closure is flanged onto the composite packaging in that it is sealingly welded onto the composite packaging with the lower side of its projecting edge, thus with the lower side of its flange. However, the free passage at the lower end of the spout is thereafter closed by paper and sealing film of the composite packaging. In the case of a bottle closure the pour-out spout for its part may be placed or screwed onto the opening of the bottle, and on its inner side is closed with a film membrane. The spout is equipped with an outer thread onto which the rotary cap may be screwed as a closure. To open, the film-reinforced paper passing through and below the welded-on spout, or the film membrane extending within the spout must be cut open or torn

open towards the opening or pressed away so that the passage may be cleared and the fluid or the pourable material may be poured or shaken out of the container through the spout. For this a sleeve or a nipple is arranged within the spout which, on rotating the screwed-on cap, is caught by this and thus is rotated by this in the same direction of rotation. By means of a thread counter-rotating to the thread on the outer side of the spout and on the outer side of the sleeve, this sleeve moves continuously in a downward direction on screwing off the rotary cap, that is to say when said sleeve is displaced upwards with respect to the liquid packaging. The lower rim of the sleeve is provided with one or more tearing or cutting teeth. In this way, and as a result of its rotation and constant downwards movement, the sleeve is to press or cut a disk out of the film-reinforced paper or film membrane which runs beneath it.

**[0002]** However, such conventional self-opener closures do not function satisfactorily. The disks are not cut cleanly from the paper film or the film membrane, but rather the sleeves simply press a piece of film out of this. The remaining edge is frayed and thus shreds of paper or film project into the passage which was supposed to be cleared. These shreds often project downwards into the container and on pouring or shaking out possibly block the path of the air flowing from outside into the container, or the even project into the path of the outflowing jet of liquid or the poured product. With larger packagings having stronger film-reinforced paper or cardboard the opening procedure is carried out even less reliably and cleanly. The sleeve moving slowly downwards and rotating at the same time, with its complete lower edge quasi simultaneously contacts the film-reinforced paper web which is to be cut open and as a whole presses it downwards and rotates on it until a hole is scraped open or broken through rather than cleanly cut open. One problem lies in the fact that the film to be cut open gives way slightly to the pressure of the sleeve acting to a certain extent as a drill bit, and thus the sleeve no longer acts on a paper film which is plane but on one which is curved downwards. Furthermore, the previous solutions demand a significant force on the part of the user as a result of the design of the sleeves, which are aptly also called penetrators, because indeed they penetrate a piece of paper film rather than cleanly cutting a circular disk out of it. That is to say, a large torque must be exerted since the teeth or tearers on the lower penetrator edge or sleeve edge firstly merely scratch the film and then they must overcome a large resistance to rotation. In the uppermost layer of the paper thickness they act similarly

to tear-open teeth, specifically in a scraping, pressing and tearing manner, rather than acting as actual cutting blades. In order to facilitate the breaking out or tearing out for conventional self-opener closures of this type, the film material or the composite material is pre-weakened at the desired tear locations by means of lasers or punching tools. However, this pre-weakening entails much technological effort. Expensive installations are required and the handling for the machining of the penetration locations on the films is time-consuming. In spite of these elaborate weakening measures, the conventional self-opener closures do not cut cleanly, but tear the paper or plastic film rather than cleanly cutting it open, which explains the large resistance to rotation. On account of these large rotation resistances, even breakages of the means which should effect the transmission of the torque from the threaded cap to the penetrator sleeve occur, or the catching cams provided to engage into grooves on the penetrator sleeve can jump out of these grooves. If this happens, the self-opener closure is no longer capable of functioning.

**[0003]** It is therefore an object of the present invention to solve these problems and to provide a self-opener closure for composite packagings or for container spouts sealed with film material, which reliably permits to cut-out the laminate disk or film disk in various dimensions in the clear spout passage and to obtain cleanly cut edges so that shreds projecting into the passage are avoided. For a multitude of film materials and composite materials it should even be possible to dispense with the targeted pre-weakening of the cutting locations by punching or laser treatment.

**[0004]** This object is achieved by a self-opener closure for composite packagings as well as for container spouts closed with film material, consisting of a spout which may be sealingly fitted onto a composite packaging or onto a container closed with film material, of an associated rotary cap, as well as of a self-opener arranged within the spout and which self-opener may be brought into rotation by the rotary cap. The self-opener closure is characterised in that the inner side of the spout is provided with at least two guide webs arranged around its inner circumference and having changing flank leads, so that the self-opener which is shaped as a sleeve and having on its outer side at least two guide ribs with one guide surface each, when continuously rotated in the inside of the spout by guidance of its guide surfaces at the guide webs,

carries out a discontinuous downwards movement which superposes its rotational movement.

**[0005]** The Figures show various views of a preferred embodiment of this self-opener closure for composite packagings. By means of these Figures the self-opener closure shall be described in detail and its function shall be explained. There are shown in:

Figure 1 the self-opener closure with its three components in a dismantled state, in a side view;

Figure 2 the self-opener closure with its three components in a dismantled state, in a side view, whereby all components are shown in a longitudinal sectional view along the centerline of the closure;

Figure 3 the self-opener closure with its three components in an assembled state in a longitudinal sectional view along the centerline of the closure;

Figure 4 the self-opener closure in an assembled state in a perspective view as seen from below at an angle, whereby the self-opener sleeve is in its initial state;

Figure 5 the self-opener closure in an assembled state in a perspective view as seen from below at an angle, whereby the self-opener sleeve is in an extended or lowered state ready for the cutting movement;

Figure 6 the self-opener closure in an assembled state in a perspective view as seen from below at an angle, whereby the self-opener sleeve is shown to be completely removed from the spout; and

Figure 7 the self-opener closure in an embodiment for assembling on a container closed with a film.

**[0006]** Figure 1 shows the self-opener closure in a dismantled state. It consists of three components made of injection moulded plastic, namely a rotary cap 1, a

discharge spout 2 and a self-opener sleeve 3. The rotary cap 1 is provided on its outer surface with knurls or grooves for ease of handling. A guarantee strip 4 is injection moulded to the lower edge of the rotary cap 1 and is connected to the rotary cap 1 only by thin material bridges or bars 5 being designed as and arranged to be predetermined breaking points. At its outer side the discharge spout 2 is provided with an outer thread which fits to an equivalent inner thread on the rotary cap 1, whereby this is not visible here. Beneath the outer thread 6 the spout 2 has a small, obliquely angled bead 7 with an angular or square-edged rim 8 on its lower side. Alternatively, instead of a discharge spout 2 having an outer thread and an appropriate threaded cap having an inner thread, a discharge spout having an appropriate cap can be foreseen, whereby the rotary cap can be mounted onto the discharge spout by means of a bayonet coupling. For this, the spout is provided on its outer side with appropriate grooves and the rotary cap is provided on its inner side with equivalent cams, or vice versa. The counter-clockwise rotation of the rotary cap, which is to be carried out initially in a horizontal plane, firstly activates the self-opener sleeve exactly in the same way as usually the threaded cap is activated, which shall be more closely described hereinafter. A radially projecting, annular and planar projection or brim 9 is formed at the lower edge or rim of the spout 2. With the lower surface of this planar projection, the spout 2 is sealingly welded onto a composite packaging made of a laminate composed of a film-reinforced paper or cardboard web. Therefore, this laminate extends continuously beneath the discharge spout 2 and, on its underside, seals the clear passage opening of the spout 2. In order to be able to pour liquid through this spout out of the packaging, the laminate in the region of the passage opening must be pressed away, perforated, cut away or torn away. It is desirable to uncover the passage opening as completely as possible, which means that the laminate in this area is cut away as cleanly as possible, after which the cut laminate disk can be pivoted away, thus clearing the passage as completely as possible. A self-opener in the form of a specially formed sleeve 3 serves to uncover the passage opening. At the lower edge of this sleeve 3 there is provided at least one lancing mandrel 10 having a sharp tip 24, which, when viewed from above onto the sleeve 3, forms a sharp cutting edge 11 in a counter-clockwise direction. At the outer circumference of the self-opener sleeve 3 there are provided at least two guide ribs 12 distributed over the circumference, and preferably, as shown in the embodiment, four guide ribs are provided. Each of these guide ribs 12 is composed of two sections

13, 14, namely a section 13 extending horizontally at the sleeve 3 and a vertical section 14, which together form a right angle. The outer tip of this right angle is bevelled at an angle of  $45^\circ$  to the sections 13, 14 and this bevelled surface forms a guide surface 15, which is intended to glide along a guide curve formed of guide webs at the inner wall of the spout 2, as shall be more clearly shown in further Figures.

**[0007]** In Figure 2 there is shown the self-opener closure also with its three components, that is to say the rotary cap 1, the discharge spout 2 and the self-opener sleeve 3 in a dismantled state. However, all components are shown in a longitudinal section along the centreline of the closure. Inside the rotary cap 1 the inner thread 16 can be seen. At the lower edge, the guarantee strip 4 is seen attached by several thin material bridges or bars 5 serving as predetermined breaking points. As a feature, within this rotary cap 1 at the underside of the cap lid in the shown embodiment, there are formed two cylinder wall segments 17, 18, whereas the radius of the corresponding cylinder is smaller than that of the cylindrically shaped rotary cap wall. Both cylinder wall segments 17, 18, which follow each other in the circumferential direction, are spaced from each other by a small lateral space, so that a slit 19 is formed between each of them. The lower edges of the two cylinder wall segments 17, 18 are designed to slope downwards and thus each form a lower edge leading downwardly directed in a screwline shape. At the discharge spout 2 shown beneath the rotary cap 1, guide webs 20 are arranged in distribution over the inner circumferential wall of the spout 2, which guide webs are to cooperate or interact with the guide ribs 12 of the self-opener sleeve 3. In the embodiment shown there are four such guide webs 20; one is shown in full, the two on the left and the right of the Figure are shown each in half, and the one arranged at the portion of the spout 2 which has been cut away for this illustration is not visible at all. Each of these guide webs 20 consists of a horizontal section 21 and a section 22 which inclines or slants upwards towards the axis of the spout. At the outer side of the spout 2 the grooves of the outer thread 6 and the bead 7 can be seen, over which the rotary cap 1, for assembling with its guarantee strip 4, can be irreversibly drawn or pushed. Because the upper side of the bead 7 is inclined, the guarantee strip 4 can be pushed down over this bead 7 under slight deformation. In contrast, and because of the sharp edge or rim 8 at the lower side of the bead 7, the guarantee

strip 4 cannot be pulled back upwards over the bead 7 once it has tightly enclosed the circumferential wall of the spout 2 below this bead. Therefore, in order to open the rotary cap 1, the guarantee strip 4 must be removed by tearing it away, thus rupturing the material bridges 5. This releases the rotary cap 1 to be turned and moved upwards. The projection 9 projecting radially from the lower rim of the spout 2 is welded to the paper laminate or cardboard laminate of a packaging for liquids or dry goods by means of ultrasonic welding. The self-opener sleeve 3 is shown beneath the spout 2. The lower edge of the sleeve 3 tapers off in a guide mandrel 10, which, when viewed from above towards the side in counter-clockwise direction, forms a sharp cutting edge 11 and tapers off at the end in a sharp tip 24. To the right of Figure 2 one sees the horizontally extending section 13 of an individual guide rib 12 at the outer wall of the sleeve 3. At the inner side close to the upper edge of the self-opener sleeve 3 a web or bridge 23 traverses the clear distance of the sleeve 3. When the components of this self-opener closure are assembled, the self-opener sleeve 3 is arranged within the spout 2. In doing so, the sleeve 3 is rotationally pushed into the spout 2 in such a manner that the guide ribs 12 of its bevelled guide surface 15 come to rest at the underside of the upper end of the inclined or slanting section 22 of the guide webs 20 at the spout 2. In turn, the rotary cap 1 is mounted in such a rotational position onto these two components that the traversing web 23 is arranged in the slits 19 between the two cylinder wall segments 17, 18 at the lower lid side of the rotary cap 1. Under slight deformation of its guarantee strip 4, the rotary cap 1 is pushed with force over the upper taper of the bead 7 and thus secures the rotary cap 1 from twisting by subsequently closely fitting to the outer side of the spout wall, because it is retained in its lowest screw position by the guarantee band 4 and can only be unscrewed if the guarantee band 4 is first torn away, because this can no longer glide over the sharp lower edge 8 of the bead 7.

**[0008]** Figure 3 shows the self-opener closure with its three components in an assembled state in a longitudinal section along the centreline of the closure. One sees that the self-opener closure 3 lies between the cylinder wall segments 17, 18 and the spout 2, and that the traversing web 23 extends at the upper edge of the sleeve 3 in the slit 19 between the neighbouring cylinder wall segments 17, 18. At the outer side of the sleeve 3 one sees the horizontal section 13 of one of its guide ribs 12. On the inner side of the spout 2 one sees the horizontal sections 21 of the guide

webs 20, and at the outer side of the spout 2 the ribs of the outer thread 6 and, a little further down, the bead 7 over which the guarantee band 4 is pushed, as well as the radial projection 9 at the lower edge or rim of the spout 2. At the inner side of the rotary cap 1 its inner thread 16 can be seen, and at the lower edge of the rotary cap 1 the guarantee band 4 connected by fine material bridges 5. In this embodiment, the self-opener closure 3 is in its initial state, that means it is completely drawn back into the rotary cap 1.

**[0009]** There now follows a description of how the components 1, 2 and 3 of this self-opener closure interact when opening the closure and thereby cutting open the paper or cardboard laminate which is welded onto the spout 2. Firstly, the guarantee band 4 is torn away. This releases the rotary cap 1 for unscrewing in that it can move upwards along the spout 2. The lateral limiting surfaces of the cylinder wall segments 17 and 18 now act upon the traversing web 23 at the self-opener closure, that means they entrain it and thus cause it to rotate in the direction of unscrewing the rotary cap 1 when viewed from above, that means in a counter-clockwise direction. In an alternative embodiment, instead of a single traversing web there can be provided a star-shaped web having three arms or webs distributed radially around the circumference from the center of the sleeve 3 and projecting outwards; in this case, suitable cylinder wall segments must be foreseen, between which the three webs come to lie. Also four radial webs which together form a cross made of two webs traversing the sleeve diameter are possible, whereas then four cylinder wall segments are distributed around the circumference. When the sleeve 3 now is brought into rotation in a counter-clockwise direction via its web 23, then the guide surfaces 15 of its guide ribs 12, as seen in Figures 1 and 2 but not visible here, glide along the underside of the guide webs 20 in a downward direction at the spout 2. Rotation of the rotary cap 1 to the left is thus accompanied by a steep, screwline downwardly directed movement of the self-opener closure 3. As a result of this steep downward movement, the paper or cardboard laminate which extends over the clear breadth of the spout 2 is initially essentially perforated or pierced by the sharp tip 24 of the lancing mandrel at the lower edge of the sleeve 3. Thus, only a hole is pierced into the edge of the laminate disk, that means that the laminate is pierced and not cut. Seen microscopically, when pierced the laminate material is displaced to all sides and is torn at the piercing point. The reaction forces of the piercing movement

are brought about via the welding by the projecting brim 9 of the spout 2. This first movement step of the self-opener closure is decisive. Due to the fact that in conventional solutions the self-opener sleeve continuously rotates downwardly directed in a screwline and its teeth thus impinge upon the film at a flat angle, they are not able to pierce the film. However, with the present solution, in a first phase the sleeve experiences a very steep downwardly directed movement. The sharp tip 24 of its lancing mandrel 10 thus impinges on the film at a steep angle and pierces it initially virtually locally. By the time the paper or cardboard or plastic film has been pierced, the sleeve 3 has reached its lowest position in relation to the spout 2, that means that the guide surface 15 at its guide ribs 12 is now positioned at the end of the inclined guide webs 22 at the inner wall of the spout, or at the beginning of the horizontal sections 21 of the guide webs. If the rotary cap 1 is further turned in a counter-clockwise direction, then also the sleeve 3 is turned further in a counter-clockwise direction but no longer moves downwards, but rotates in a horizontal plane. Now the lancing mandrel 10 protruding through the paper or cardboard film acts as a knife with its sharp cutting edge 11. Thus the cutting edge 11 cuts out a circular disk out of the paper or cardboard laminate along the lower inner edge of the spout 2. The cutting movements extend over one rotation of the sleeve of about 340°. At the finish of the cutting rotation, the cut out disk is suspended merely by a thin material bridge and, by means of the pressure force of the cutting edge 11 acting in the cutting direction, is pivoted or is folded downwards into the packaging and is retained in this downwardly pivoted position. Thus, in principle, this self-opener closure functions like a classic can opener. Also when opening a can it is decisive that the lid is first pierced by an essentially vertical movement of the tip of the cutting tool upon and through the can lid. Only when the can lid has been pierced by the tip of the cutting tool does there follow a separate, now horizontally directed cutting movement of the cutting tool. The present self-opener closure achieves precisely this can-opener effect, in that the sleeve moves first of all steeply downwards and in a first phase merely pierces the film with the tip 24 of the lancing mandrel 10, and thereafter in a second phase, the lancing mandrel 10 with its cutting edge 11 acts as a cutting tool in that the sleeve is rotated horizontally. Therefore, an essential feature is that the movement of the sleeve is discontinuous or erratic. After a steep downwardly directed movement for piercing the film there follows a discontinuous point and then a horizontal rotational movement for cutting. Piercing and cutting are

distinctly different, such as in opening a metal can with a can opener. At the lower edge of the inner side of the spout 2 there is a recess 25 which is bordered or framed by ramps 26. During the end phase of the rotational movement of the sleeve 3, a horizontal section 21 enables one of its guide ribs 2 to glide over the ramp 26 and engage into this recess 25. Thereafter the sleeve 3 can be neither rotated further forwards nor backwards, so that after cutting out and pivoting away of the laminate disk, the sleeve is held in this position. In this manner the laminate disk which has been almost totally cut away is reliably retained pivoted downwards in the liquid packaging. Until the entire cutting movement, that is the rotation of the sleeve 3 about 340° after piercing of the paper or cardboard laminate, has been completed, the rotary cap 1 at the spout 2 is screwed upwards for such a distance that the cylinder wall segments 17, 18 projecting downwards at the underside of the rotary cap lid are lifted over the web 23 at the sleeve 3 and thus cannot transmit any torque to the web 23. Thereafter, the rotary cap 1 is completely unscrewed from the spout 2 and the liquid can now exit the liquid packaging via the uncovered spout 2 or, in the case of dry goods, can be poured out through the spout 2. Now the rotary cap 1 can again be screwed onto the spout 2 to re-seal the closure. When the rotary cap 1 is again screwed on to close the closure, the screwline shaped, downwards extending lower edges of the cylinder wall segments 17, 18 effect that no torque in a clockwise direction is transmitted to the web 23, in that these screwline shaped lower edges merely glide over the upper side of the traversing web 23, but can no longer entrain it.

**[0010]** Figures 4 and 5 illustrate the mode of operation of this self-opener closure particularly well. Figure 4 shows the self-opener closure in an assembled state in a perspective view as seen from below at an angle. The self-opener closure 3 is in its initial state. At its upper edge one sees a portion of the traversing web 23 which connects its upper edge at two points. This web 23 lies between the two cylinder wall segments 17, 18 which are moulded to the underside of the lid of the rotary cap 1. When the rotary cap 1 is rotated in a loosening direction, in this case as seen from below in a clockwise direction, then the cylinder wall segments 17, 18 entrain the web 23 lying there between and thus also the sleeve 3, and, due to the special guide ribs 12 at its outer side and the guide webs 20 at the inner side of the spout, compelling the sleeve to be moved in a downward direction in a steep spiral. In doing

so, the sharp tip 24 of the lancing mandrel 10 acts as a piercing tip and first pierces the paper or cardboard laminate welded onto the underside of the projecting brim 9 of the spout 2 of the composite packaging.

5 **[0011]** In Figure 5 there is shown the self-opener closure with the self-opener sleeve in an extended or completely lowered state. Having reached this position, the sleeve 3 may rotate further only in a horizontal plane, whereby the lancing mandrel 10 now acts as a knife, because its edge, here seen from below and oriented in a clockwise direction, is formed as a sharp cutting edge 11. When the rotary cap 1 is further  
10 rotated by 340°, this cutting edge moves along the lower inner edge of the spout 2, thereby cutting a circular disk out of the paper or cardboard laminate which is welded to the underside of the projection 9, but is not shown here. As soon as the sleeve 3 has completed a rotation about 340° after having pierced the paper laminate, the end of one of the horizontal sections 13 of its guide ribs 12 engages in the recess 25 at  
15 the inner wall of the spout 2 and prevents the sleeve 3 from being able to be rotated further forwards or reversely. In this position the sleeve 3 has almost completely pivoted the disk which was cut away from the laminate downwards into the container and securely retains it in this position. The discharge through the spout 2 is thus enabled.

20 **[0012]** Figure 6 shows the discharge spout 2 and the sleeve 3 of the self-opener closure in an assembled state in a perspective view as seen from below at an angle, whereby the self-opener sleeve 3 is shown to be completely disengaged from the spout 2, so that the special arrangement of its guide ribs 12 can be seen more clearly  
25 and thus its function can be better understood.

**[0013]** Figure 7 shows an alternative embodiment of this self-opener closure for assembling on a membrane sealed neck of a container or a bottle. Therefore, the discharge spout 2 is not provided with a projecting rim at its underside, but is  
30 arranged over a shoulder 27 in a thread sleeve 28, which can be screwed on to the outer thread of a bottleneck or to the discharge spout of any type of container which is closed or sealed at its upper rim with a film.

### Patent claims

1. Self-opener closure for composite packagings and for container spouts sealed with film material, comprising a spout (2) which is mountable on a composite packaging or on a container spout sealed with film material, an associated rotary cap (1) and a self-opener (3) being arranged within the spout (2), said self-opener (3) being rotatable by means of the rotary cap (1), *characterised in that* the inner side of the spout (2) is provided with at least two guide webs (20) being arranged around its inner circumference and having varying inclines, so that the sleeve-shaped self-opener (3), at whose outer side there are arranged at least two guide ribs (12) each having a guide surface (15), describes a discontinuous downwardly directed movement when continuously rotating within the spout (2) by guiding its guide surfaces (15) at the guide webs (20), which superposes its rotational movement.
2. Self-opener closure for composite packagings and for container spouts sealed with film material according to claim 1, *characterised in that* the self-opener is formed as a sleeve (3), comprising at its lower edge at least one lancing mandrel (10) having a sharp, downwardly projecting tip (24), and which comprises a sharp edge (11) at its flank showing in a counter-clockwise circumferential direction when seen from above.
3. Self-opener closure for composite packagings and for container spouts sealed with film material according to one of the previous claims, *characterised in that* the rotary cap (1) comprises at its inner side at least two detached cylinder wall segments (17, 18) being spaced apart from each other in circumferential direction, and that the self-opener is formed as a sleeve (3), which comprises at the inner side of its upper edge at least one straight or angled web (23) extending radially from the sleeve axis and traversing the diameter, which web (23) fits between the spaces of the cylinder wall segments (17, 18) at the rotary cap (1), whereby the sleeve wall is arranged between the cylinder wall segments (17, 18) and the spout walls, and that the sleeve (3) has at its outer side at least two continuous guide ribs (12) which are arranged in distribution over its circumference, which cooperate with the same number of guide webs

(20) being arranged at the inner side of the spout (2) in distribution over its circumference, in such a manner that when the rotary cap (1) is rotated, its torque is transmitted over the lateral limiting edges of the cylinder wall segments (17, 18) to the traversing web (23) and thus to the sleeve (3), and that the guide ribs (12) at the sleeve (3) and spout (2) are formed such, that when rotated, the sleeve (3) initially describes a steep downwardly directed screwline movement and subsequently assumes a purely rotational movement in a horizontal plane.

4. Self-opener closure for composite packagings and for container spouts sealed with film material according to one of the previous claims, *characterised in that* the rotary cap (1) comprises at its inner side two detached cylinder wall segments (17, 18) being spaced apart from each other in circumferential direction, and that the self-opener is formed as a sleeve (3), which comprises at the inner side of its upper edge at least one traversing web (23) which traverses its diameter, said traversing web (23) fits between the spaces of the cylinder wall segments (17, 18) at the rotary cap (1), whereby the sleeve wall is arranged between the cylinder wall segments (17, 18) and the spout walls, and that the sleeve (3) at its outer side comprises at least two continuous guide ribs (12) arranged in distribution over its circumference, which interact with the same number of guide webs (20) which are arranged at the inner side of the spout (2) in distribution over its circumference, in such a manner, that when the rotary cap (1) is rotated its torque is transmitted over the lateral limiting edges of the cylinder wall segments (17, 18) to the traversing web (23) and thus to the sleeve (3) and that the guide webs (12) at the sleeve (3) and spout (2) are formed such, that when rotated, the sleeve (3) firstly describes a steep downwardly directed screwline and subsequently assumes a purely rotational movement in a horizontal plane.

5. Self-opener closure for composite packagings and for container spouts sealed with film material according to one of claims 1 or 2, *characterised in that* the rotary cap (1), at the inner side of its cap lid, comprises three free-standing cylinder wall segments (17, 18) being spaced apart from each other in a circumferential direction, and that the self-opener is formed as a sleeve (3), which comprises at the inner side of its upper edge a star-shaped web (23)

composed of three webs extending radially from the sleeve axis and which fit between the spaces of the cylinder wall segments (17, 18) at the rotary cap (1), whereby the sleeve wall is arranged between the cylinder wall segments (17, 18) and the spout walls, and that the sleeve (3) at its outer side comprises at least two continuous guide ribs (12) arranged in distribution over its circumference, which interact with the same number of guide webs (20) which are arranged at the inner side of the spout (2) in distribution over its circumference, in such a manner, that when the rotary cap (1) is rotated its torque is transmitted over the lateral limiting edges of the cylinder wall segments (17, 18) to the traversing web (23) and thus to the sleeve (3) and that the guide webs (12) at the sleeve (3) and spout (2) are formed such, that when rotated, the sleeve (3) firstly describes a steep downwardly directed screwline and subsequently assumes a purely rotational movement in a horizontal plane.

6. Self-opener closure for composite packagings and for container spouts sealed with film material according to one of the previous claims, *characterised in that* the lower edges of the cylinder wall segments (17, 18) each form a like curve sloping in an axial direction with respect to the cylinder.

7. Self-opener closure for composite packagings and for container spouts sealed with film material according to one of the previous claims, *characterised in that* the guide ribs (12) at the self-opener sleeve (3) and the guide webs (20) at the spout (2) are designed such, that the guide ribs (12) at the outer wall of the self-opener sleeve (3) are each composed of a horizontal section (13) and an adjoining vertical section (14), whereby the tip of the right angle formed by these sections (13, 14) is bevelled at an angle of 45° with respect to the outer side of its legs, which forms a guide surface (15), and that the guide webs (20) at the inner wall of the spout (2) are each composed of a section (22) extending with a constant inclination at the circumferential wall and an adjoining horizontal section (21).

8. Self-opener closure for composite packagings and for container spouts sealed with film material according to one of the previous claims, *characterised in that* at the lower inner edge of the spout (2) there is provided a recess (25) which is

bordered by a ramp (26), and which is intended for receiving the end of a guide rib (12) of the self-opener sleeve (3) in the end position of its rotational movement.

- 5 9. Self-opener closure for composite packagings and for container spouts sealed with film material according to one of the previous claims, *characterised in that* the sleeve (3) at its outer side comprises three or four continuous guide ribs (12) arranged in distribution over its circumference, which interact with the same number of guide webs (20) which are arranged at the inner side of the spout (2)
  - 10 in distribution over its circumference, in such a manner, that when the rotary cap (1) is rotated its torque is transmitted over the lateral limiting edges of the cylinder wall segments (17, 18) to the traversing web (23) and thus to the sleeve (3) and that the guide webs (12) at the sleeve (3) and spout (2) are formed such, that when rotated, the sleeve (3) firstly describes a steep downwardly
    - 15 directed screwline and subsequently assumes a purely rotational movement in a horizontal plane.
10. Self-opener closure for composite packagings and for container spouts sealed with film material according to one of the previous claims, *characterised in that*
  - 20 the discharge spout (2) is a threaded spout and the rotary cap (1) is an associated threaded cap, or that the discharge spout (2), together with the rotary cap (1), form a bayonet coupling, and that the discharge spout (2) in its lower region is provided with a bead (7) which is obliquely angled at its upper side, and at its lower side forms an angular rim (8), and that the rotary cap (1)
    - 25 comprises at its lower edge a guarantee strip (4) moulded thereto by thin material bridges (5) designed to be predetermined breaking points, which can be irreversibly pushed over the bead (7).

FIG. 1

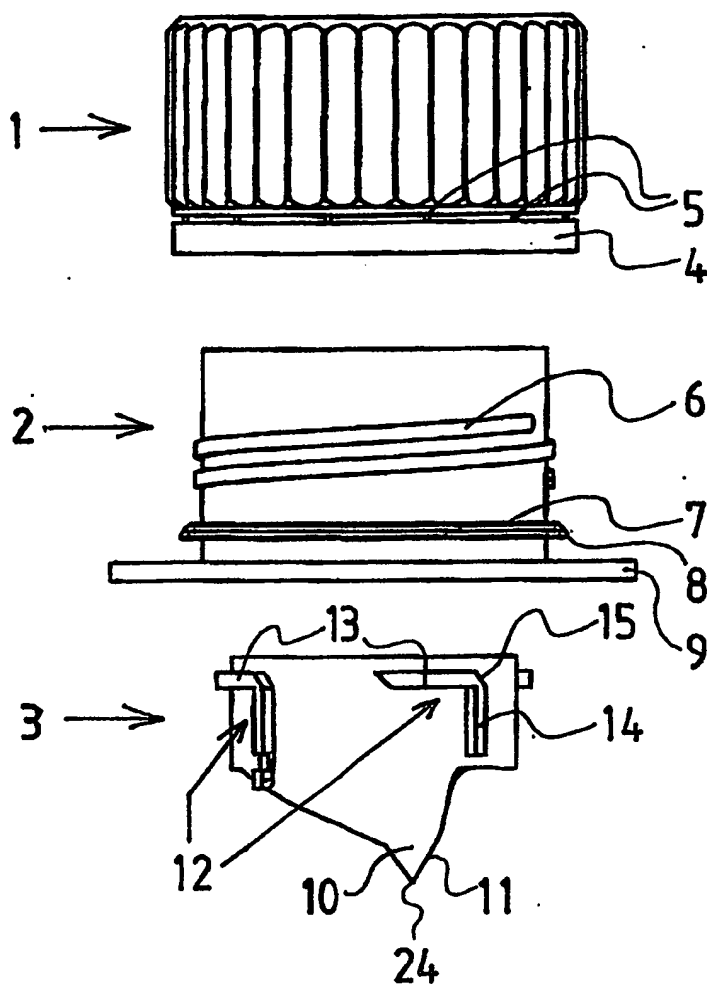


FIG. 2

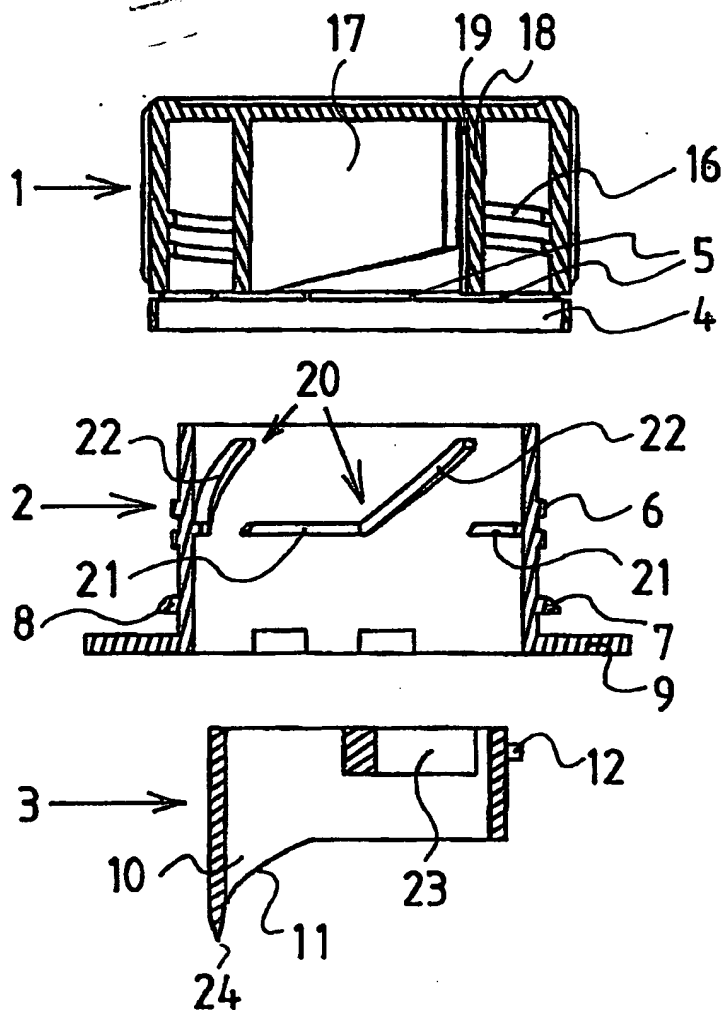


FIG. 3

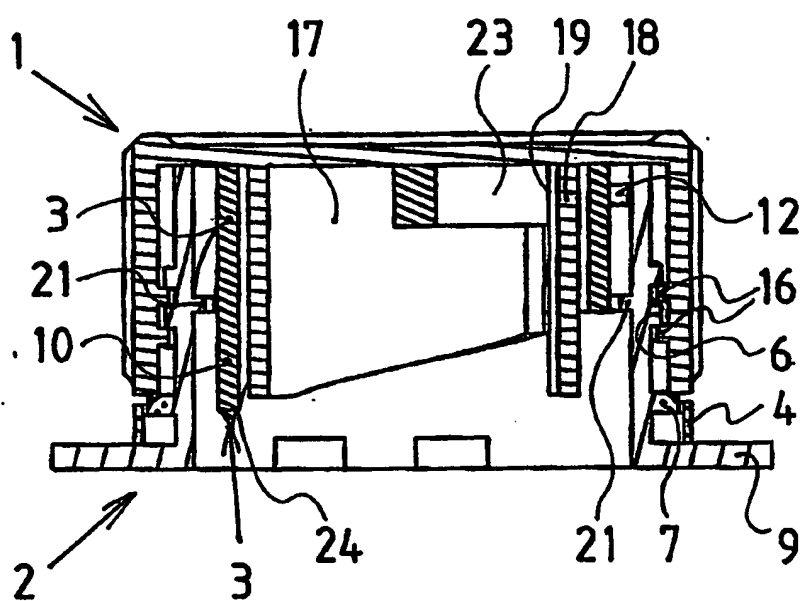


FIG. 4

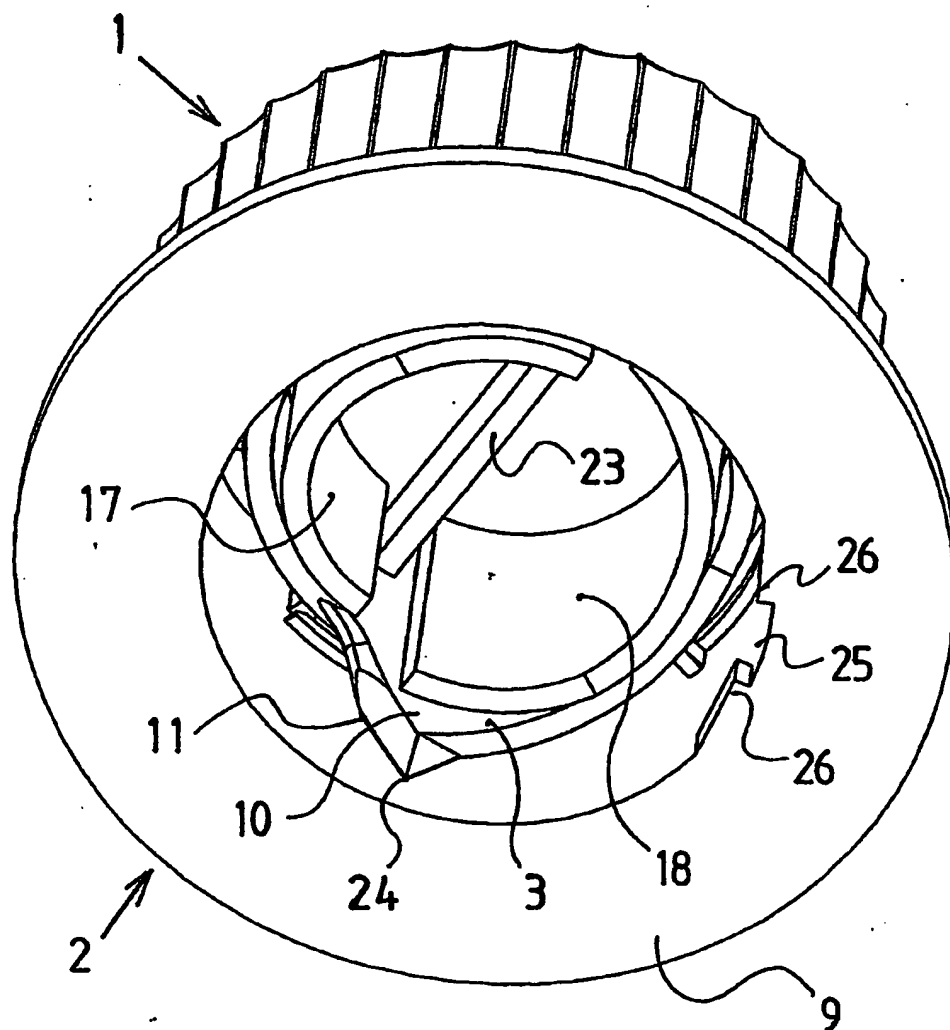




FIG. 6


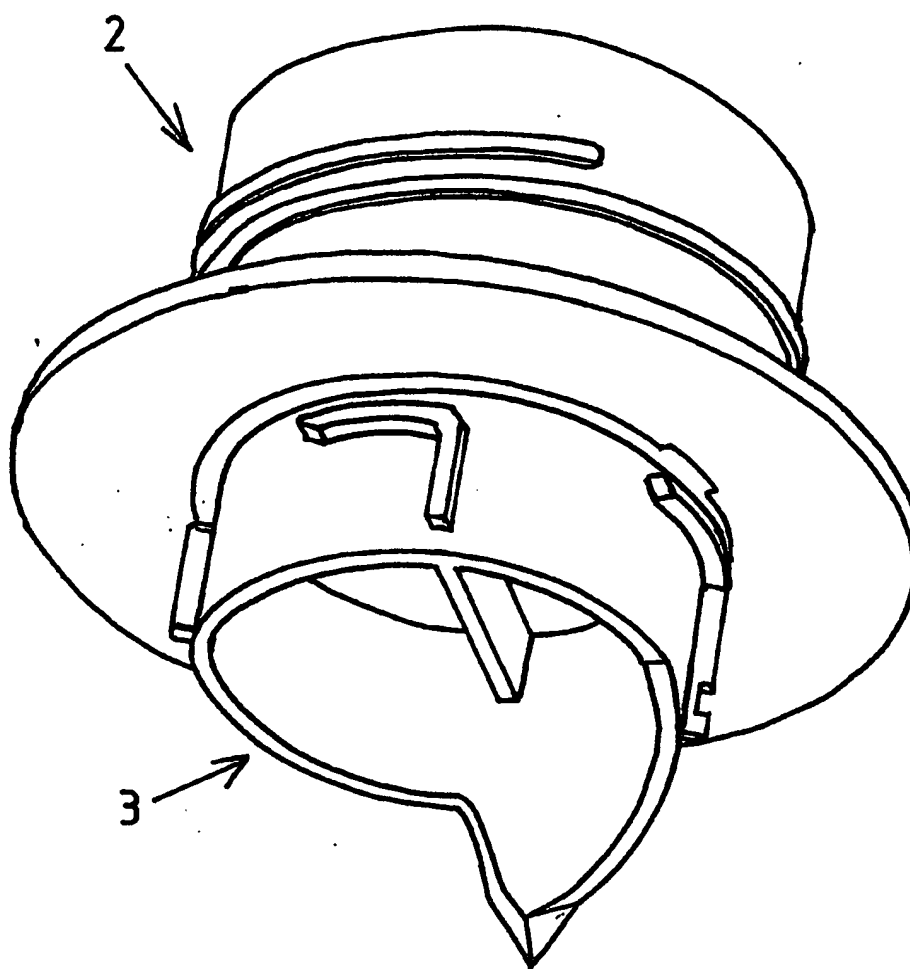


FIG. 7

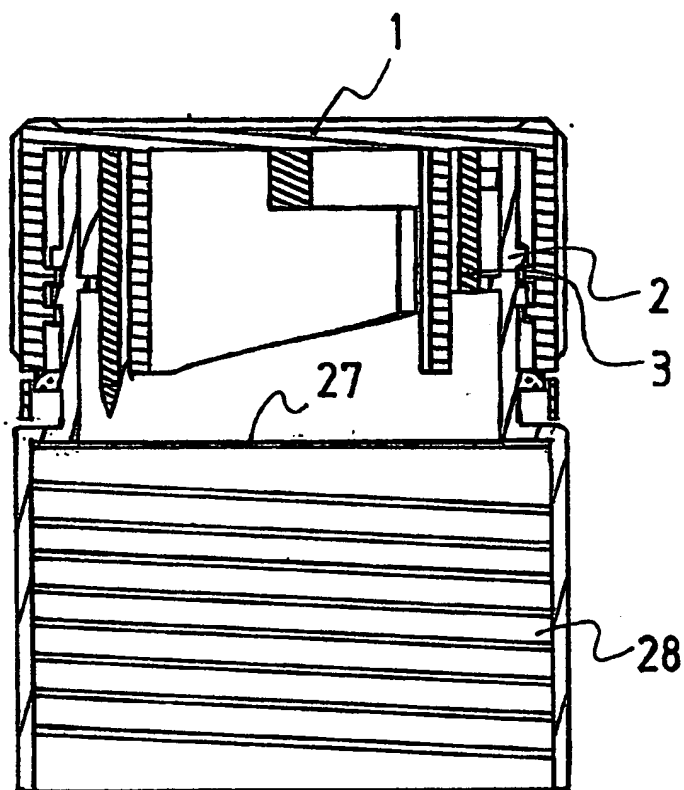

## INTERNATIONAL SEARCH REPORT

International Application No.

PCT/03/00328

A. CLASSIFICATION OF SUBJECT MATTER  
IPC 7 B65D5/74

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)  
IPC 7 B65D

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the International search (name of data base and, where practical, search terms used)

EPO-Internal, PAJ, WPI Data

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 1 088 764 A (TETRA LAVAL HOLDINGS & FINANCE) 4 Apr11 2001 (2001-04-04) abstract; figures	1,3,5
A	WO 95 05996 A (INT PAPER CO) 2 March 1995 (1995-03-02) abstract; figures	1,3,5
A	US 5 482 176 A (MAIETTA MICHAEL ET AL) 9 January 1996 (1996-01-09) abstract; figures 6-11,13,14	1,3,5

☐ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

## \* Special categories of cited documents:

\*A\* document defining the general state of the art which is not considered to be of particular relevance

\*E\* earlier document but published on or after the international filing date

\*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

\*O\* document referring to an oral disclosure, use, exhibition or other means

\*P\* document published prior to the international filing date but later than the priority date claimed

\*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

\*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

\*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

\*a\* document member of the same patent family

Date of the actual completion of the international search

19 September 2003

Date of mailing of the international search report

26/09/2003

Name and mailing address of the ISA

European Patent Office, P.B. 6818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

SERRANO GALARRAGA, J

Best Available Copy

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/CH 03/00328

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
EP 1088764	A	04-04-2001	EP 1088764 A1	04-04-2001
			BR 0004583 A	29-05-2001
			CN 1290638 A	11-04-2001
			JP 2001106249 A	17-04-2001
			TW 474883 B	01-02-2002
			US 6398075 B1	04-06-2002
WO 9505996	A	02-03-1995	AU 7519094 A	21-03-1995
			BR 9407361 A	23-04-1996
			CA 2170409 A1	02-03-1995
			EP 0714376 A1	05-06-1996
			FI 960893 A	26-04-1996
			JP 9501890 T	25-02-1997
			NO 960755 A	23-04-1996
			WO 9505996 A1	02-03-1995
US 5482176	A	09-01-1996	AU 2123695 A	03-10-1995
			BR 9507068 A	30-09-1997
			CA 2185563 A1	21-09-1995
			CN 1143936 A	26-02-1997
			CZ 9602707 A3	18-03-1998
			EP 0750566 A1	02-01-1997
			FI 963637 A	07-11-1996
			JP 9510422 T	21-10-1997
			NZ 283239 A	24-03-1997
			WO 9525042 A1	21-09-1995

## INTERNATIONALER RECHERCHENBERICHT

Internat. Aktenzeichen

PCT/03/00328

**A. KLASSIFIZIERUNG DES ANMELDUNGSGEGENSTANDES**  
 IPK 7 B65D5/74

Nach der Internationalen Patentklassifikation (IPK) oder nach der nationalen Klassifikation und der IPK

**B. RESEARCHIERTE GEBIETE**

Recherchierte Mindestprüfstoff (Klassifikationssystem und Klassifikationssymbole)  
 IPK 7 B65D

Recherchierte aber nicht zum Mindestprüfstoff gehörende Veröffentlichungen, soweit diese unter die recherchierten Gebiete fallen

Während der internationalen Recherche konsultierte elektronische Datenbank (Name der Datenbank und evtl. verwendete Suchbegriffe)

EPO-Internal, PAJ, WPI Data

**C. ALS WESENTLICH ANGESEHENE UNTERLAGEN**

Kategorie*	Bezeichnung der Veröffentlichung, soweit erforderlich unter Angabe der in Betracht kommenden Teile	Betr. Anspruch Nr.
A	EP 1 088 764 A (TETRA LAVAL HOLDINGS & FINANCE) 4. April 2001 (2001-04-04) Zusammenfassung; Abbildungen	1,3,5
A	WO 95 05996 A (INT PAPER CO) 2. März 1995 (1995-03-02) Zusammenfassung; Abbildungen	1,3,5
A	US 5 482 176 A (MAIETTA MICHAEL ET AL) 9. Januar 1996 (1996-01-09) Zusammenfassung; Abbildungen 6-11,13,14	1,3,5



Weitere Veröffentlichungen sind der Fortsetzung von Feld C zu entnehmen



Siehe Anhang Patentfamilie

\* Besondere Kategorien von angegebenen Veröffentlichungen :

\*A\* Veröffentlichung, die den allgemeinen Stand der Technik definiert, aber nicht als besonders bedeutsam anzusehen ist

\*E\* älteres Dokument, das jedoch erst am oder nach dem internationalen Anmeldedatum veröffentlicht worden ist

\*L\* Veröffentlichung, die geeignet ist, einen Prioritätsanspruch zweifelhaft erscheinen zu lassen, oder durch die das Veröffentlichungsdatum einer anderen im Recherchenbericht genannten Veröffentlichung belegt werden soll oder die aus einem anderen besonderen Grund angegeben ist (wie ausgeführt)

\*O\* Veröffentlichung, die sich auf eine mündliche Offenbarung, eine Benutzung, eine Ausstellung oder andere Maßnahmen bezieht

\*P\* Veröffentlichung, die vor dem internationalen Anmeldedatum, aber nach dem beanspruchten Prioritätsdatum veröffentlicht worden ist

\*T\* Spätere Veröffentlichung, die nach dem internationalen Anmeldedatum oder dem Prioritätsdatum veröffentlicht worden ist und mit der Anmeldung nicht kollidiert, sondern nur zum Verständnis des der Erfindung zugrundeliegenden Prinzips oder der ihr zugrundeliegenden Theorie angegeben ist

\*X\* Veröffentlichung von besonderer Bedeutung, die beanspruchte Erfindung kann allein aufgrund dieser Veröffentlichung nicht als neu oder auf erfinderischer Tätigkeit beruhend betrachtet werden

\*Y\* Veröffentlichung von besonderer Bedeutung, die beanspruchte Erfindung kann nicht als auf erfinderischer Tätigkeit beruhend betrachtet werden, wenn die Veröffentlichung mit einer oder mehreren anderen Veröffentlichungen dieser Kategorie in Verbindung gebracht wird und diese Verbindung für einen Fachmann naheliegend ist

\*Z\* Veröffentlichung, die Mitglied derselben Patentfamilie ist

Datum des Abschlusses der internationalen Recherche

19. September 2003

Absenddatum des internationalen Recherchenberichts

26/09/2003

Name und Postanschrift der internationalen Recherchenbehörde  
 Europäisches Patentamt, P.B. 5818 Patentaan 2  
 NL - 2280 HV Rijswijk  
 Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
 Fax (+31-70) 340-3018

Bevollmächtigter Beauftragter

SERRANO GALARRAGA, J

# INTERNATIONALER RECHERCHENBERICHT

Angaben zu Veröffentlichung und zur selben Patentfamilie gehören

Internationales Aktenzeichen

PCT/93/00328

Im Recherchenbericht angeführtes Patentdokument	Datum der Veröffentlichung	Mitglied(er) der Patentfamilie	Datum der Veröffentlichung
EP 1088764 A	04-04-2001	EP 1088764 A1	04-04-2001
		BR 0004583 A	29-05-2001
		CN 1290638 A	11-04-2001
		JP 2001106249 A	17-04-2001
		TW 474883 B	01-02-2002
		US 6398075 B1	04-06-2002
WO 9505996 A	02-03-1995	AU 7519094 A	21-03-1995
		BR 9407361 A	23-04-1996
		CA 2170409 A1	02-03-1995
		EP 0714376 A1	05-06-1996
		FI 960893 A	26-04-1996
		JP 9501890 T	25-02-1997
		NO 960755 A	23-04-1996
		WO 9505996 A1	02-03-1995
US 5482176 A	09-01-1996	AU 2123695 A	03-10-1995
		BR 9507068 A	30-09-1997
		CA 2185563 A1	21-09-1995
		CN 1143936 A	26-02-1997
		CZ 9602707 A3	18-03-1998
		EP 0750566 A1	02-01-1997
		FI 963637 A	07-11-1996
		JP 9510422 T	21-10-1997
		NZ 283239 A	24-03-1997
		WO 9525042 A1	21-09-1995